



SURVEY PRODUCT: Topcon Link™

TOPCON



Topcon Link™

Topcon Data
Compatibility Software

Quick Reference Guide



Topcon Link Quick Reference Guide

Part Number 7040-0026

Rev D

©Copyright Topcon Positioning Systems, Inc.

April, 2004

All contents in this manual are copyrighted by
Topcon Positioning Systems, Inc.

All rights reserved.

Terms and Conditions

Thank you for buying this Topcon Product. This manual has been prepared to assist you with the care and operation of the Product and its use is subject to these Terms and Conditions and those more fully set forth in the Operator's/User's Manual.

Usage and Safety

This Product is designed for use by professionals. Always use safety precautions when operating this or any Topcon product.

Copyrights and Trademarks

The information in this manual is a copyright of Topcon Positioning Systems, Inc. (Topcon) and is for use only with the Product. TopSURV, Topcon Link, and Topcon are trademarks or registered trademark of Topcon Positioning Systems, Inc. Microsoft, Windows, the Windows CE icon, and ActiveSync are trademarks or registered trademarks of Microsoft Corporation.

Other product and company names mentioned herein may be trademarks of their respective owners.

Disclaimer of Warranty and License Agreement

Please see the Operator's/User's Manual for detailed information on warranties and the license agreement which may apply to the Product. EXCEPT FOR SUCH WARRANTIES AND LICENSES, THIS MANUAL AND THE PRODUCT ARE PROVIDED "AS-IS". TOPCON AND ITS DISTRIBUTORS SHALL NOT BE LIABLE FOR TECHNICAL OR EDITORIAL ERRORS OR OMISSIONS CONTAINED HEREIN; NOR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE FURNISHING, PERFORMANCE OR USE OF THIS MATERIAL OR THE PRODUCT.

Use of any computer programs or software supplied by Topcon or downloaded from the Topcon website in connection with the Product implies acceptance of the Terms and Conditions here and in the Operator's/User's Manual.

Contents

Chapter 1

Introduction	1
---------------------------	----------

Chapter 3

Total Stations	3
Creating Coordinate Files	4
Preparing a Control Data File	5
Editing Points	6
Renaming Points	7
Cutting, Copying, Deleting Points	8
Saving Files in GTS-7 Format	9
Exporting Control Data Files	10
Importing Raw Data Files	13
Viewing and Editing Raw Data Files	14
Computing and Adjusting	
Points Coordinates	16
Converting Raw Data Files to GIS Format ...	19

Chapter 3

TPS Receivers 25

 Downloading TPS Receiver Files 25

 Converting Raw Data Files to
 RINEX Format 28

Chapter 4

TopSURV Files 31

 Preparing TPS Controller Files for Import ... 31

 Importing TopSURV Jobs 35

 Viewing and Editing TopSURV GPS Files . 37

 Viewing Points and Stations 37

 Editing Base Coordinates 38

 Editing GPS Antenna Height 39

 Editing Offsets 40

 Viewing Vectors 41

 Computing Coordinates 42

 Converting Raw Data Files to

 Coordinate Files (ASCII/TSV/Files) 43

 Viewing Converted Files 46

Introduction

This manual is designed to provide the quickest way to begin using the Topcon Link software.

The manual is organized into three sections, according to the application of Topcon Link for different measuring equipment and applications, specifically:

- Total Stations
- TPS Receivers
- TopSURV

More detailed information about Topcon Link can be found in the *Topcon Link Reference Manual*.

Total Stations

This chapter describes using Topcon Link with a Total Station.

Examples used here are for the following surveying scheme (Figure 2-1):

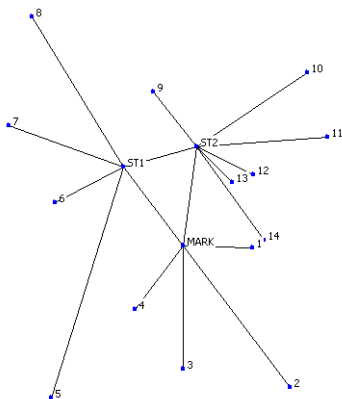


Figure 2-1. Surveying Scheme Used

Creating Coordinate Files

1. Use a text editor (e.g., Microsoft Notepad) to create a coordinate file for export to a Total Station (Figure 2-2).
2. Use the format Name of Point, Northing, Easting, Height when entering data to make the file compatible with Topcon Link (Figure 2-2).




Figure 2-2. Coordinate File

3. Save the file as “Control_data1.csv”.

Preparing a Control Data File

1. Open Topcon Link, then click **File ▶ Open File** or the **Open** icon on the toolbar (Figure 2-3).




Figure 2-3. Open File

2. On the Open dialog box, select the Format name as Name,N,E,Z,Code (*.csv) from the Coordinate File collapsible list, then select the Control_data1.csv file and click **Open** (Figure 2-4).


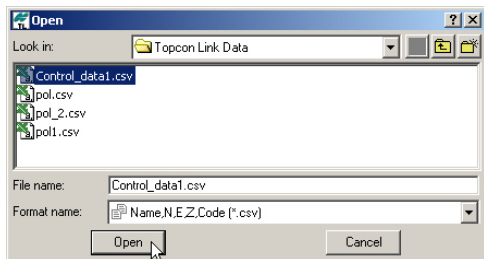


Figure 2-4. Select Format Name and File

The file opens in Topcon Link (Figure 2-5).

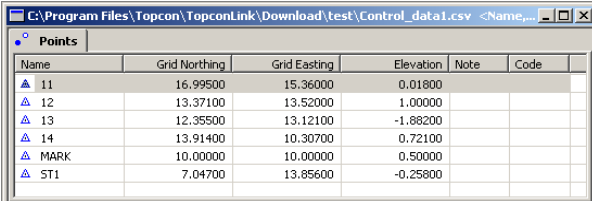


The screenshot shows a window titled "C:\Program Files\Topcon\TopconLink\Download\test\Control_data1.csv". The window contains a "Points" tab with a table of data. The table has columns for Name, Grid Northing, Grid Easting, Elevation, Note, and Code. The data rows are as follows:

Name	Grid Northing	Grid Easting	Elevation	Note	Code
▲ 11	16.99500	15.36000	0.01800		
▲ 12	13.37100	13.52000	1.00000		
▲ 13	12.35500	13.12100	-1.88200		
▲ 14	13.91400	10.30700	0.72100		
▲ MARK	10.00000	10.00000	0.50000		
▲ ST1	7.04700	13.85600	-0.25800		

Figure 2-5. File Display in Topcon Link

Editing Points

1. Right-click within a point's data area to display a pop-up menu (Figure 2-6).

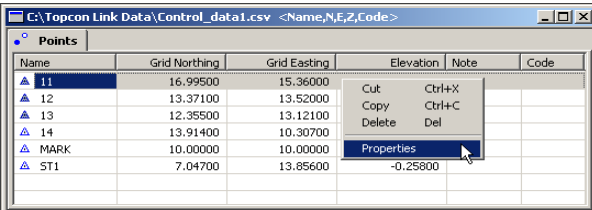

The screenshot shows the same "Points" tab as in Figure 2-5, but with a context menu open over the first row (point 11). The menu options are:

- Cut (Ctrl+X)
- Copy (Ctrl+C)
- Delete (Del)
- Properties (highlighted by the mouse cursor)

Figure 2-6. Points Tab Pop-up Menu

2. Click **Properties** to display the properties dialog box (Figure 2-7).

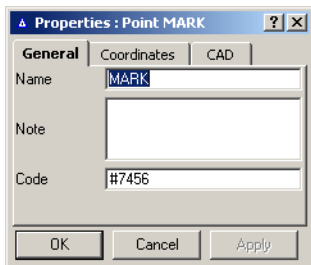


Figure 2-7. Point Properties Dialog Box

Use this dialog box to edit a point's Name and Notes, Coordinates, or CAD files.

Renaming Points

To rename a point, do one of the following:

- Click, pause, click a point's name and type a new name, then press **Enter**.
- Use the "Editing Points" on page 6 procedure to display the Points Properties dialog box (Figure 2-7).

Cutting, Copying, Deleting Points

Right-click within a point's data area, or press Shift and click several points then right-click, to display a pop-up menu (Figure 2-8).

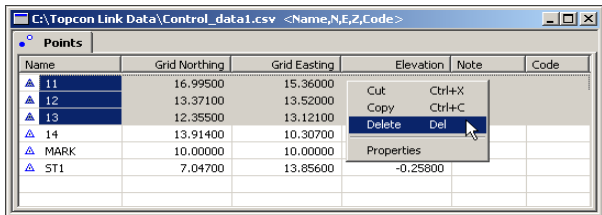


Figure 2-8. Points Tab Pop-up Menu

- Cut – clears the highlighted point(s) without removing them from the file.
- Copy – copies the highlighted point(s) for pasting somewhere else.
- Delete – removes the highlighted point(s) from the coordinate file (in Figure 2-8, these are points 11, 12, 13).

Saving Files in GTS-7 Format

To save edited coordinate files in the GTS-7 Points file format (Figure 2-9):

1. Click **File ▶ Save As**.
2. On the Save As dialog box, select the GTS-7 Points format from the Format name drop-down list
3. Enter a File name and click **Save**.

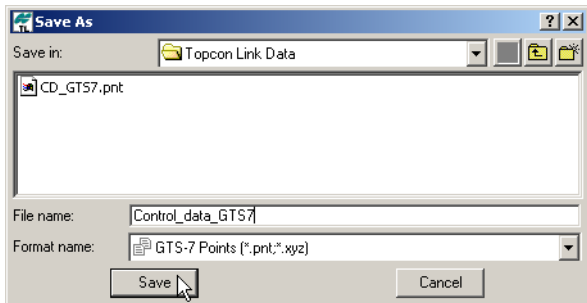


Figure 2-9. Save File for Total Stations

Exporting Control Data Files

1. Click the **Export** icon on the toolbar to display the Export to Device dialog box (Figure 2-10).

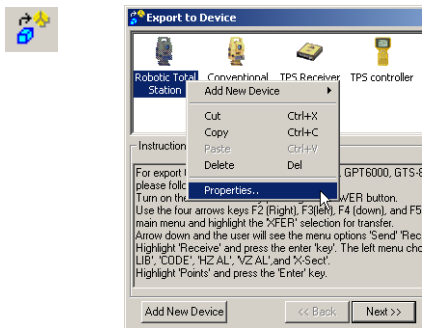


Figure 2-10. Export Icon and Export to Device Dialog Box

2. Right-click the desired Total Station icon (either Robotic Total Station or Conventional Total Station) and click **Properties** on the pop-up menu (Figure 2-10).
3. Using the Properties dialog box and the General and Advanced tabs, set the following information (Figure 2-11 on page 2-11):

- General tab – select the serial port communication with a Total Station from the Port listbox; specify the model of the Total Station from the Model listbox.
- Advanced tab – select communication parameters identical to those set in the Total Station: Baud Rate, Data Bits, Parity, Stop Bits, and Protocol.

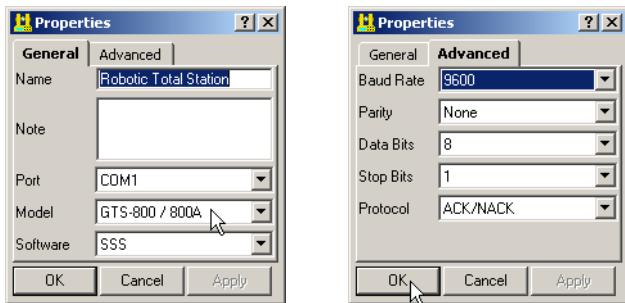


Figure 2-11. Set Total Station Properties

4. When finished, click **OK** to apply the values and close the Properties dialog box.

5. Follow the steps shown in the Instruction field of the Export to Device dialog box, preparing the Total Station to accept the control data file.
6. Click **Next** on the Export to Device window to display the Export to Total Station from dialog box (Figure 2-12).
7. Specify the name of the Control Data file to download and click **Open** (Figure 2-12).

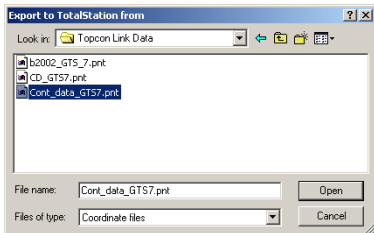


Figure 2-12. Export Control Data File

8. Check that the file downloaded from the computer to the Total Station (refer to the Total Station's operational manual for this information).

Importing Raw Data Files

1. Click the **Import** icon on the toolbar. On the Import from Device dialog box, click the icon of the Total Station type used and click **Next** (Figure 2-13).

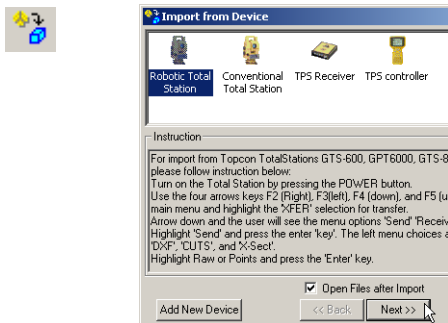


Figure 2-13. Select Import From Device

Topcon Link applies the communication parameters defined earlier during the Export to device process.


2. Follow the instructions listed in the Instruction field and click **Next** (Figure 2-13).


3. On the Download from TotalStation to dialog box, specify the folder in which to store the file and the name of the Raw Data file in the File name field.
4. Click **Save**. The content of the Raw Data file displays in Topcon Link's work area.

Viewing and Editing Raw Data Files

For a Raw Data file, the information displays in two tabs: Points and TS Obs.

- The Points tab lists all points and stations in the file.

–Point icon: 

–Station icon: 

The Northing, Easting, Elevation coordinates display only for the points with coordinates measured and computed, and then stored in the raw data file (ST2 station in the example), or were exported to the Total Station from the computer (MARK and ST1 in the example).

- The TS Obs tab has two panels (Figure 2-14):

The screenshot shows a window titled "C:\Program Files\Topcon\TopconLink\Download\test\B2002_7.raw <GTS-7 Raw>". The window has two tabs: "Points" and "TS Obs". The "TS Obs" tab is active and displays two tables side-by-side.

#	Point ...	Instrument Hei...	#	Point ...	Point...	Reflector Hei...	Azimuth	Horizontal Cl...	Zenit
1	MARK	1.7780	1	MARK	ST1	1.60000	0°0'00.0...	322°33'16.0...	97°
2	ST1	1.4600	2	MARK	ST1	1.60000		322°33'16.0...	97°
3	ST2	1.4100	3	MARK	ST2	1.60000		7°56'17.0000	97°
			4	MARK	ST2	1.60000		7°56'17.0000	97°
			5	MARK	1	1.60000		91°02'23.0000	78°
			6	MARK	2	1.60000		142°44'56.0...	65°
			7	MARK	3	1.60000		180°04'31.0...	94°
			8	MARK	4	1.60000		217°29'35.0...	90°

Figure 2-14. TS Obs Tab

–The left panel contains information on the station/points with known positions where the Total Station was placed.

To edit the height of an instrument:

1. Click, pause, click a station's height.
2. Type a new height value (e.g., 1.778m)
3. Press **Enter** on the keyboard.

–The right panel contains information on the points relevant to the station selected in the left panel. These points have unknown positions where the Reflector was placed.

To edit the height of instrument for the Reflector data for multiple points:

1. Highlight multiple points heights using the **Shift** key and clicking the points.
2. Enter the necessary height in one of the highlighted lines.
3. Press **Enter** on the keyboard.

Computing and Adjusting Points Coordinates

By default, Topcon Link obtains coordinates without adjusting them. But it is possible to compute the positions by performing adjustment of points.

1. To select a network adjustment, click **Process ▶ Process Properties**.
2. On the *Process properties* dialog box, select the Compute Coordinates tab and choose one of the adjustment type (Least Squares for this example of a network) and click **OK** (Figure 2-15 on page 2-17).

Refer to the Topcon Link Reference Manual for a description of each adjustment type.

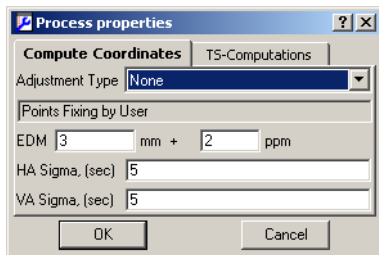


Figure 2-15. Process Properties – Compute Coordinates Tab

3. Click the **Compute coordinates of points** icon on the toolbar (Figure 2-16).



Figure 2-16. Compute Coordinates of Points Icon

The Points tab displays the adjusted coordinates (Figure 2-17 on page 2-18).

The screenshot shows a software window titled "Points" with a toolbar containing a "TS Obs" icon. Below the toolbar is a table with the following data:

Name	Northing(Groun...	Easting(Ground...	Height(Ground)...	Note	Code
1	9.92658	13.37644	-0.55484		TREE
2	3.11271	15.18472	2.60299		TREE
3	3.99923	9.96081	-1.76973		TREE
4	6.93078	7.61552	-1.26692		TREE
5	2.61567	3.53164	-0.67603		TREE
6	12.10962	3.72762	-2.29878		TREE
7	15.89230	1.47505	0.81138		TREE
8	21.17757	2.61513	-0.96428		TREE
9	17.54395	8.53908	-2.46546		TREE
10	18.45459	16.02705	-1.12359		TREE
11	15.32808	17.02450	-1.12740		TREE
12	13.50758	13.39019	-0.14612		TREE
13	13.11367	12.37238	-3.02795		TREE
14	10.29126	13.91642	-0.42483		TREE
MARK	10.00600	10.00100	-0.90400	base # 1	STAT
ST1	13.87625	7.06997	-1.66213		STAT
ST2	14.87177	10.70617	-1.60769		STAT

Figure 2-17. Adjusted Coordinates

- Click the **Save** icon on the toolbar to save the coordinates obtained (Figure 2-18).



Figure 2-18. Save Icon

Converting Raw Data Files to GIS Format

1. Click **Convert** on the toolbar to display the Convert File dialog box (Figure 2-19).



Figure 2-19. Click Convert Icon

2. In the From panel, select the File format of the raw data file (Figure 2-20).

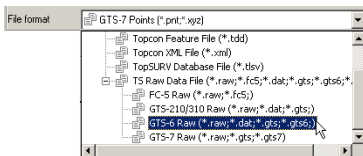


Figure 2-20. Select Raw Data File Format

3. Click the **Browse** (“...”) button, select the raw data file using the Open for Convert dialog box,

and click **Open**; the full path of the file displays (Figure 2-21).

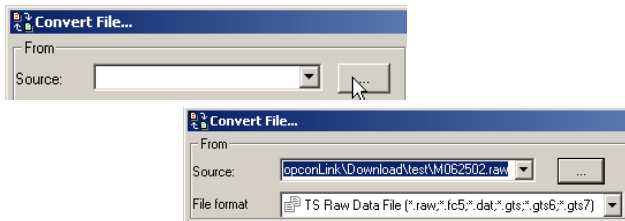


Figure 2-21. Click Browse and Select File

4. In the To panel, press the **Browse** (“...”) button.
5. Using the Select a file dialog box, define a folder in which to store the file, select the DXF format and name the file **M_GIS**. Click **Select**. The full path of the file displays in the Destination field (Figure 2-22).




Figure 2-22. Destination and Format of File

- Click **Advanced options** to display further conversion parameters (Figure 2-23).

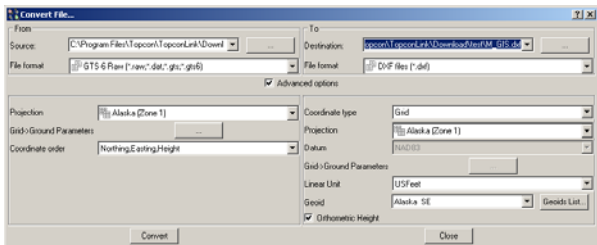


Figure 2-23. Advanced Options

- In the left panel, enter the parameters used when surveying in the field:
 - Specify the Projection type (Figure 2-24).

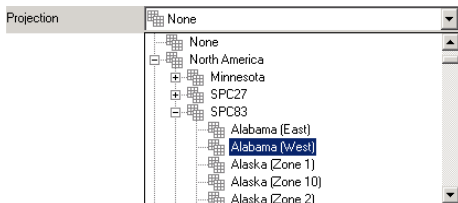


Figure 2-24. Specify Projection

- Click and enable the Grid->Ground Parameters check box (Figure 2-25).



Figure 2-25. Enable Grid->Ground Parameters

- Click the **Grid->Ground Parameters** button. Enter the parameters of the relation between the Grid and Ground coordinate types (Figure 2-26). Click **OK**.

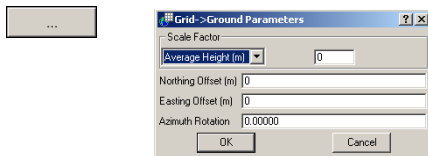


Figure 2-26. Click Grid->Ground Button and Enter Parameters

- Define the sequence of positions in the Raw Data file (Figure 2-27).




Figure 2-27. Define Coordinate Order

8. In the right panel, enter the parameters required after the conversion:
- Select the Coordinate type, either Ground, Grid, or Lat, Lon, h.
 - Select either the Projection or Datum type.
 - Select the Linear Unit for horizontal and vertical positions; either IFeet, Meters, or USFeet.
 - Select the Geoid type (Figure 2-28) (when Orthometric Height is enabled).

To set up a geoid model, click **Geoid List** and click **Add** in the Geoid List dialog box. In the Open dialog box, select the necessary geoid file and click **Open**.




Figure 2-28. Select a Geoid Type

9. Click **Convert** to begin converting the Raw Data file to the GIS format.

TPS Receivers

This chapter describes using Topcon Link with a TPS GPS+ receiver.

Downloading TPS Receiver Files

1. Click the **Import** button on the toolbar to import a raw data file from the receiver to the computer; the Import from Device dialog displays (Figure 3-1).

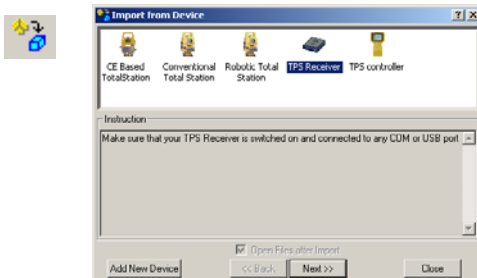


Figure 3-1. Click Import Button

2. Right-click the TPS receiver icon. From the pop-up menu, click **Properties**.
3. Select the serial port used for communication with the TPS receiver, either Auto, COM1, COM2, or USB then click **OK** (Figure 3-2).




Figure 3-2. Receiver Properties

4. Click **Next** on the Import from Device dialog box. The next window displays Device files and the Topcon Link Download folder (Figure 3-3 on page 3-27).

highlighted files into the folder created on the computer.

When downloaded, the TPS files display in the right panel of the Import from Device window.

Converting Raw Data Files to RINEX Format

1. Click the **Convert** icon on the toolbar to display the Convert File dialog box (Figure 3-5).



Figure 3-5. Click Convert Icon

- In the From panel, select the File format of the raw data file (Figure 3-6).

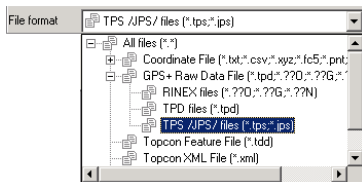


Figure 3-6. Select Raw Data File Format

- Click the **Browse** (“...”) button select the raw data file using the Open for Convert dialog box, and click **Open** (Figure 3-7).

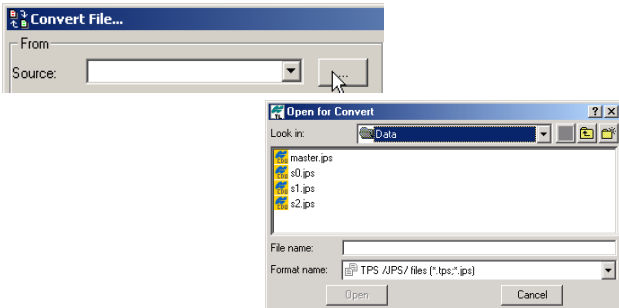


Figure 3-7. Click Browse and Select File

The full path of the file displays in the Source field (Figure 3-8).




Figure 3-8. Click Browse and Select File

4. In the right panel, press the **Browse** (“...”) button.
5. In the Select a file dialog box, create a folder in which to store the file, select the RINEX format and enter the name of the file (e.g., standard).

Click **Select**. The full path of the file displays in the Destination field (Figure 3-9).




Figure 3-9. Converted File Destination

6. Click **Convert** to begin the conversion of the selected file into RINEX.

TopSURV Files

This chapter describes using Topcon Link with a TPS controller and TopSURV.

Preparing TPS Controller Files for Import

TPS controllers store information in the *.tsv file format. When importing *.tsv files:

- Use only Topcon Link to guarantee against data loss.
- Topcon Link transforms the file to a *.tlsx file that can be read on a computer.

Before importing data from a TPS controller into Topcon Link, install ActiveSync® from Microsoft® onto the computer. This software connects a computer to a device running the Windows CE system. ActiveSync is available for

free download from the Microsoft website (<http://www.microsoft.com>).

To connect the TPS controller and computer for the first time:

1. Connect the serial ports of the two devices with the RS-232 cable. Turn on the TPS controller and computer.
2. Run ActiveSync on the computer (Figure 4-1).



Figure 4-1. ActiveSync

3. Click **Next**. ActiveSync will search the computer ports for a device operated with Windows CE and connected to the computer.

ActiveSync displays “Connected” if the computer and TPS controller connect

successfully (Figure 4-2 on page 4-33). The system tray also displays a green circle, indicating a TPS controller-computer connection.

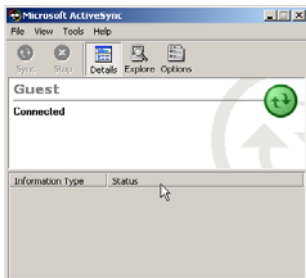


Figure 4-2. Controller and Computer Connected

To connect the TPS controller (as well as a TPS receiver or Total Station) to a computer with one serial port:

1. On the ActiveSync main window click **File ► Connection Settings**.
2. Enable the following fields on the Connection Settings dialog box (Figure 4-3 on page 4-34):

- Allow network (Ethernet) and Remote Access Service (RAS) server connection with this desktop computer
- Show status icon in Taskbar

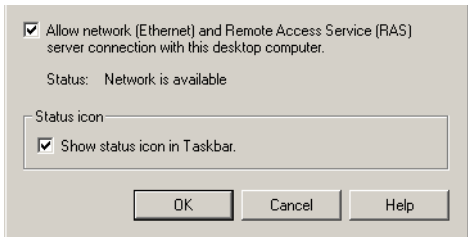


Figure 4-3. Connection Settings

If these settings are fixed, then on subsequent TPS controller-computer connections:

1. Run ActiveSync on the computer.
2. Click **File ▶ Get Connected**.
3. Click **Next** to connect the TPS controller and computer.

Importing TopSURV Jobs

1. Click **Import** on the toolbar. The Import from Device dialog box displays (Figure 4-4).

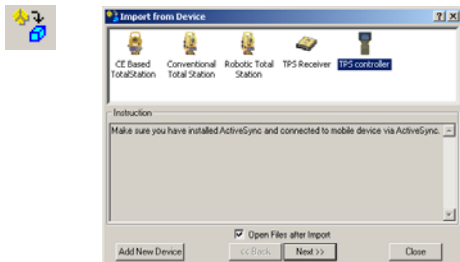


Figure 4-4. Click Import From Device

2. Click the TPS controller icon and click **Next** to connect the computer and controller.
Once connected the second Import from Device dialog box displays (Figure 4-5 on page 36).

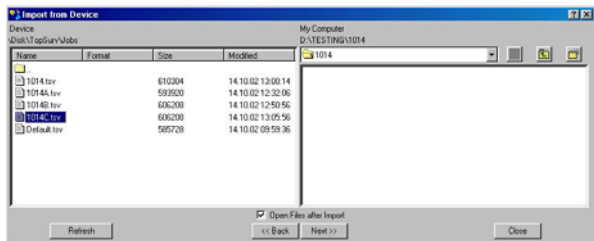


Figure 4-5. Import From Device – Device Files

3. In the left panel, highlight a TopSURV GPS file (e.g., 1014.tsv). Press **Shift** and click several jobs to import them at once.
4. In the right panel, click the **New Folder** button and create and name a new folder. Open the newly created folder.
5. Click **Next** to begin downloading the highlighted jobs to the folder on the computer.

When successfully downloaded and converted to the 1014C.tsv format, the name of file displays in the right panel of the *Import From Device* window.

Viewing and Editing TopSURV GPS Files

TopSURV GPS files display information in six tabs (Figure 4-6), described in the following sections.




Name	Latitude	Longitude	Ell. Height (m)	Code	Note	Control
0	55°41'56.118N	37°34'01.072E	213.909			None
Auto1	55°41'56.963N	37°33'59.954E	217.703			None
Auto2	55°41'56.963N	37°33'59.954E	217.709			None
Auto3	55°41'56.963N	37°33'59.954E	217.707			None
Topo1	55°41'56.963N	37°33'59.954E	217.718			None
Topo2	55°41'56.963N	37°33'59.954E	217.713			None
Topo3	55°41'56.963N	37°33'59.954E	217.710			None

Figure 4-6. Points Tabs

Viewing Points and Stations

The Points tab (Figure 4-6) lists all points and stations stored in the file. Auto (kinematic) and Topo (static) points positions, obtained from the GPS solution with TopSURV, display as a set of Lat,Lon,H or N,E,Elevation coordinates, based on the user-specified coordinate system in TopSURV.

The Points tab displays coordinates for:

- Base points: 
- Static points: 
- Kinematic points: 

Editing Base Coordinates

1. Right-click a Base and click **Properties** in the pop-up menu that displays.
2. Enter new Lat, Lon, H or N, E, Elevation coordinates in the applicable fields on the Coordinates tab (Figure 4-7).




Figure 4-7. Enter New Coordinates

3. Click **OK**.

Editing GPS Antenna Height

Use the GPS Occupations tab to edit the GPS antenna height for Static and Kinematic points.

1. Press **Shift** and highlight the desired antenna heights (Figure 4-8).
2. Click one of the highlighted heights and type in the antenna's height (Figure 4-8).

Point Name	Original Name	Antenna Type	Antenna Height (m)	Ant Height Met...
0	0	Legant	1.770	Slant
Auto1-Auto3	Auto1-Auto3	HPer	0.000	Vertical
Topo1	Topo1	HPer	0.000	Vertical
Topo2	Topo2	HPer	0.000	Vertical
Topo3	Topo3	HPer	0.000	Vertical

Point Name	Original Name	Antenna Type	Antenna Height (m)	Ant Height Met...
0	0	Legant	1.770	Slant
Auto1-Auto3	Auto1-Auto3	HPer	0.000	Vertical
Topo1	Topo1	HPer	2.050	Vertical
Topo2	Topo2	HPer	0.000	Vertical
Topo3	Topo3	HPer	0.000	Vertical

Figure 4-8. Edit Antenna Heights

3. Press **Enter**.

Editing Offsets

Use the Properties dialog box to enter different horizontal and vertical offsets between a survey point and sub-antenna point.

1. On the GPS Occupations tab, right-click a point and click **Properties** on the pop-up menu that displays.
2. On the Properties dialog box, click the **Offset** tab enter the desired values (Figure 4-9).

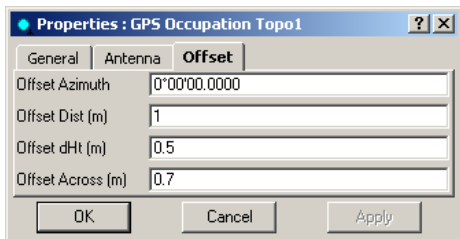


Figure 4-9. Enter Offsets

3. Click **OK**.

Viewing Vectors

The GPS Obs tab displays information about vectors contained in the TopSURV GPS file.

1. To display the vectors errors, right-click the vector and click **Properties** from the pop-up menu that displays.
2. The horizontal and vertical accuracies of the vector display in the Observation tab of the Properties dialog box (Figure 4-10).


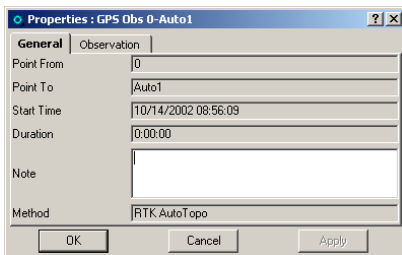


Figure 4-10. Horizontal and Vertical Accuracies

3. Click **OK** to confirm the settings.

Computing Coordinates

- To calculate (or re-calculate with new settings) coordinates, click **Compute coordinates of points** on the toolbar. The updated coordinates display in the Points tab (Figure 4-11).

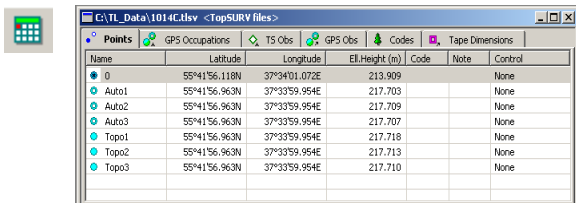

Name	Latitude	Longitude	Ell. Height (m)	Code	Note	Control
0	55°41'56.118N	37°34'01.072E	213.909			None
Auto1	55°41'56.963N	37°33'59.954E	217.703			None
Auto2	55°41'56.963N	37°33'59.954E	217.709			None
Auto3	55°41'56.963N	37°33'59.954E	217.707			None
Topo1	55°41'56.963N	37°33'59.954E	217.718			None
Topo2	55°41'56.963N	37°33'59.954E	217.713			None
Topo3	55°41'56.963N	37°33'59.954E	217.710			None

Figure 4-11. Compute Coordinates of Points

- Click **Save** on the toolbar.

Topcon Link creates a backup of the original file with an additional extension (*.initial; e.g., 1014C.tlsv.initial). This backup file remains in the same folder as the *.tlsv file (1014C.tlsv). Any further changes are made to the *.tlsv file.

Converting Raw Data Files to Coordinate Files (ASCII/TSV/Files)

This section describes modifying the type of point coordinates (i.e., from Lat,Lon,H to UTM).

1. Click **Convert** on the toolbar to display the Convert File dialog box (Figure 4-12).

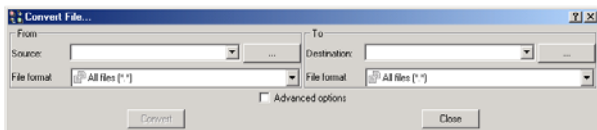


Figure 4-12. Click Convert Icon

2. In the From panel, select the File format of the raw data file—TSV files (*.tsv).
3. Click the **Browse** (“...”) button, select the *.tsv raw data file using the Open for Convert dialog box, and click **Open**; the full path of the file displays (Figure 4-13 on page 4-44).

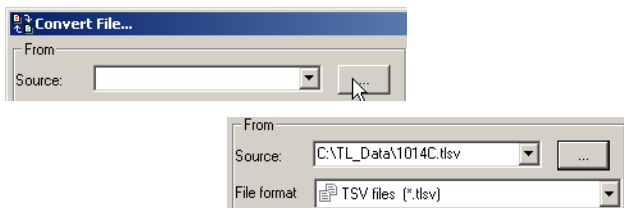


Figure 4-13. Click Browse and Select File

4. In the To panel, click the **Browse** (“...”) button.
5. In the Select a file dialog box, define a folder in which to store the file, select the Name,N,E,Z,Code format and enter the rtk_1014c_UTM name of the file.
6. Click **Select** to display the full path of the file to be created in the Destination field of the Convert File window (Figure 4-14).




Figure 4-14. Destination and Format of File

7. Click **Advanced options** to display further conversion parameters (Figure 4-15).

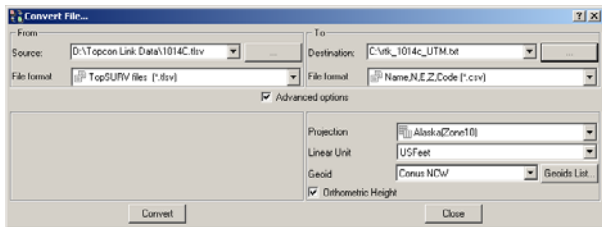



Figure 4-15. Advanced Options

8. Enter the parameters required after the conversion (Figure 4-15):
 - Select the Projection type.
 - Select the Linear Unit for horizontal and vertical positions; either IFeet, Meters, or USFeet.
 - Select the Geoid type (when the Orthometric Height checkbox is enabled).
9. Click **Convert** to begin converting the TopSURV GPS file to the defined format.

Viewing Converted Files

1. Click **Open** on the toolbar.
2. In the Open dialog box, select the file format, select the file, and click **Open**.

The file's content displays in the Topcon Link work area (Figure 4-16).

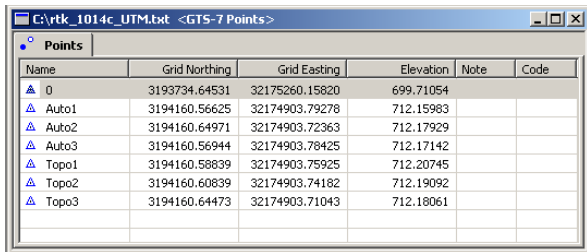

The screenshot shows a software window with a title bar that reads "C:\rkt_1014c_UTM.txt <GTS-7 Points>". The window contains a table with the following data:

Name	Grid Northing	Grid Easting	Elevation	Note	Code
▲ 0	3193734.64531	32175260.15820	699.71054		
▲ Auto1	3194160.56625	32174903.79278	712.15983		
▲ Auto2	3194160.64971	32174903.72363	712.17929		
▲ Auto3	3194160.56944	32174903.78425	712.17142		
▲ Topo1	3194160.58839	32174903.75925	712.20745		
▲ Topo2	3194160.60839	32174903.74182	712.19092		
▲ Topo3	3194160.64473	32174903.71043	712.18061		

Figure 4-16. Converted File's Content



Topcon Positioning Systems, Inc.

©2004 Topcon Corporation. All Rights Reserved.

No unauthorized duplication.

P/N: 7040-0027 Rev. D 4/04 00